

**ACCESORIOS
SEGÚN NORMA DIN**
*FITTINGS
ACCORDING TO DIN STANDARD*




ACCESORIOS SEGÚN NORMA DIN

FITTINGS ACCORDING TO DIN STANDARD

	PÁG.:
Codo 90° N-3D. <i>Elbow 90° N-3D</i>	A.D.1
Te Igual. <i>Equal Tee</i>	A.D.2
Te Reductora. <i>Reducer Tee</i>	A.D.3
Reducción Concéntrica/Excéntrica. <i>Concentric/Eccentric Reducer</i>	A.D.4

CODO 90° N-3D **ELBOW 90° N-3D**

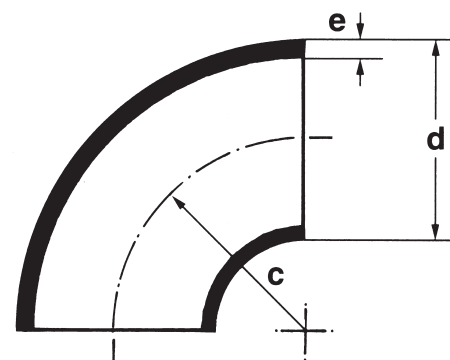


DIN 2605

ød mm.	e mm.	c mm.	b mm.
17,2	1,6	23	32
	2		
	2,3		
21,3	1,6	28	38
	2		
	2,3		
	2,6		
26,9	1,6	29	43
	2		
	2,3		
	2,6		
33,7	2	38	56
	2,6		
	2,9/3,0		
42,4	2	48	69
	2,6		
	3		
	3,2		
48,3	2	57	82
	2,6		
	3		
	3,2		
60,3	2	76	106
	2,6		
	3		
	3,2		
76,1	2	95	133
	2,6		
	2,9/3,0		
	3,2		

ød mm.	e mm.	c mm.	b mm.
88,9	2	114	159
	2,3		
	2,6		
	2,9/3,0		
114,3	2	152	210
	2,6		
	2,9/3,0		
	3		
139,7	2	190	260
	2,6		
	3		
	4		
168,3	2	229	313
	2,6		
	3		
	4		
219,1	2	305	414
	2,6		
	3		
	4		
273	2	381	518
	2,6		
	3		
	4		
323,9	2	457	619
	2,6		
	3		
	4		
355,6	2	533	711
	2,6		
	3		
	4		
406,4	2	610	813
	2,6		
	3		
	4		

TE IGUAL

EQUAL TEE

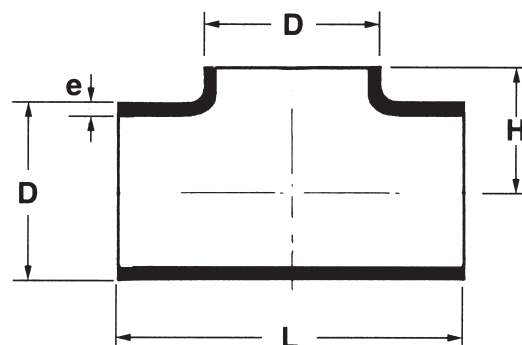


DIN 2615

øD mm.	e mm.	L mm.	H mm.
17,2	1,6	40	20
	2		
	2,3		
21,3	1,6	50	25
	2		
	2,3		
	2,6		
26,9	1,6	58	29
	2		
	2,3		
	2,6		
33,7	2	76	38
	2,6		
	2,9/3,0		
42,4	2	96	48
	2,6		
	3		
	3,2		
48,3	2	114	57
	2,6		
	3		
	3,2		
60,3	2	128	64
	2,6		
	3		
	3,2		
76,1	2	152	76
	2,6		
	2,9/3,0		
	3,2		

øD mm.	e mm.	L mm.	H mm.
88,9	2	172	86
	2,3		
	2,6		
	2,9/3,0		
114,3	2	210	105
	2,6		
	2,9/3,0		
139,7	2	248	124
	2,6		
	3		
	4		
168,3	2	286	143
	2,6		
	3		
	4		
219,1	4,5	356	178
	3		
	4		
273	5	432	216
	3		
	4		
323,9	5	508	254
	3		
	4		
355,6	5	558	279
	3		
	4		
406,4	6	610	305
	3		
	4		

TE REDUCTORA

REDUCER TEE

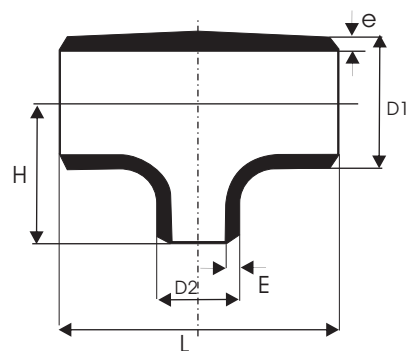

DIN 2615

D1 / D2 mm.	e mm.	L mm.	H mm.
21,3 17,2	1,6	—	—
	2		
	2,3		
26,9 21,3 17,2	1,6	58	29
	2		
	2,3		
	2,6		
33,7 17,2 21,3 26,9	1,6	76	38
	2		
	2,3		
	2,6		
42,4 21,3 26,9 33,7	2	96	48
	2,6		
	2,9/3,0		
48,3 21,3 26,9 33,7 42,4	2	114	57
	2,6		
	3		
	3,2		
60,3 26,9 33,7 42,4 48,3	2	128	64
	2,6		
	3		
	3,2		
76,1 33,7 42,4 48,3 60,3	2	152	76
	2,6		
	3		
	3,2		
88,9 42,4 48,3 60,0 76,1	2	172	86
	2,6		
	2,9/3,0		
	3,2		


D1 / D2 mm.	e mm.	L mm.	H mm.
114,3 48,3 60,3 76,1 88,9	2	210	105
	2,3		
	2,6		
	2,9/3,0		
139,7 76,1 88,9 114,3	2	248	124
	2,6		
	2,9/3,0		
168,3 76,1 88,9 114,3 139,7	2	286	143
	2,6		
	3		
	4		
219,1 76,1 88,9 114,3 139,7 168,3	2	356	178
	2,6		
	3		
	4		
	4,5		

REDUCCION CONCENTRICA

CONCENTRIC REDUCER

REDUCCION EXCENTRICA

ECCENTRIC REDUCER

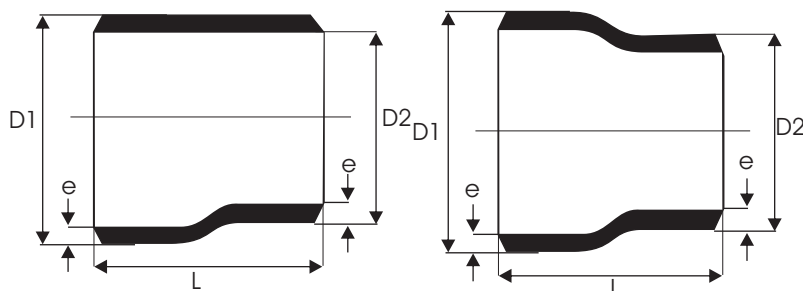

DIN 2616

D1 / D2 mm.	e mm.	L mm.	H mm.
21,3 17,2	1,6	—	—
	2		
	2,3		
26,9 21,3 17,2	1,6	58	29
	2		
	2,3		
	2,6		
33,7 17,2 21,3 26,9	1,6	76	38
	2		
	2,3		
	2,6		
42,4 21,3 26,9 33,7	2	96	48
	2,6		
	2,9/3,0		
48,3 21,3 26,9 33,7 42,4	2	114	57
	2,6		
	3		
	3,2		
60,3 26,9 33,7 42,4 48,3	2	128	64
	2,6		
	3		
	3,2		
76,1 33,7 42,4 48,3 60,3	2	152	76
	2,6		
	3		
	3,2		
88,9 42,4 48,3 60,0 76,1	2	172	86
	2,6		
	2,9/3,0		
	3,2		

D1 / D2 mm.	e mm.	L mm.	H mm.
114,3 48,3 60,3 76,1 88,9	2	210	105
	2,3		
	2,6		
	2,9/3,0		
139,7 76,1 88,9 114,3	2	248	124
	2,6		
	2,9/3,0		
168,3 76,1 88,9 114,3 139,7	2	286	143
	2,6		
	3		
	4		
219,1 76,1 88,9 114,3 139,7 168,3	2	356	178
	2,6		
	3		
	4		
	4,5		

