

**ACCESORIOS
SEGÚN NORMA DIN**
FITTINGS
ACCORDING TO DIN STANDARD




ACCESORIOS SEGÚN NORMA DIN

FITTINGS ACCORDING TO DIN STANDARD

	PÁG.:
Codo 90° N-3D. <i>Elbow 90° N-3D</i>	A.D.1
Te Igual. <i>Equal Tee</i>	A.D.2
Te Reductora. <i>Reducer Tee</i>	A.D.3
Reducción Concéntrica/Excéntrica. <i>Concentric/Eccentric Reducer</i>	A.D.4

CODO 90° N-3D

ELBOW 90° N-3D

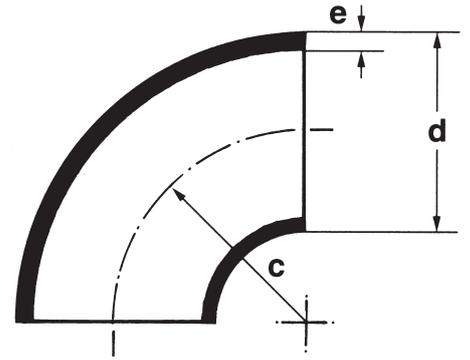


DIN 2605

ød mm.	e mm.	c mm.	b mm.
17,2	1,6	23	32
	2		
	2,3		
21,3	1,6	28	38
	2		
	2,3		
26,9	2,6	29	43
	1,6		
	2		
	2,3		
33,7	2	38	56
	2,6		
	2,9/3,0		
42,4	2	48	69
	2,6		
	3		
	3,2		
48,3	2	57	82
	2,6		
	3		
	3,2		
60,3	2	76	106
	2,6		
	3		
	3,2		
76,1	2	95	133
	2,6		
	2,9/3,0		
	3,2		

ød mm.	e mm.	c mm.	b mm.
88,9	2	114	159
	2,3		
	2,6		
	2,9/3,0		
114,3	2	152	210
	2,6		
	2,9/3,0		
139,7	2	190	260
	2,6		
	3		
	4		
168,3	2	229	313
	2,6		
	3		
	4		
219,1	4,5	305	414
	3		
	4		
273	5	381	518
	3		
	4		
	5		
323,9	3	457	619
	4		
	5		
355,6	3	533	711
	4		
	5		
406,4	3	610	813
	4		
	6		

TE IGUAL

EQUAL TEE

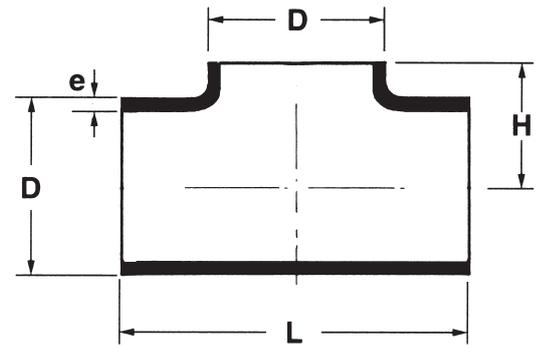


DIN 2615

øD mm.	e mm.	L mm.	H mm.
17,2	1,6	40	20
	2		
	2,3		
21,3	1,6	50	25
	2		
	2,3		
	2,6		
26,9	1,6	58	29
	2		
	2,3		
	2,6		
33,7	2	76	38
	2,6		
	2,9/3,0		
42,4	2	96	48
	2,6		
	3		
	3,2		
48,3	2	114	57
	2,6		
	3		
	3,2		
60,3	2	128	64
	2,6		
	3		
	3,2		
76,1	2	152	76
	2,6		
	2,9/3,0		
	3,2		

øD mm.	e mm.	L mm.	H mm.
88,9	2	172	86
	2,3		
	2,6		
	2,9/3,0		
114,3	2	210	105
	2,6		
	2,9/3,0		
139,7	2	248	124
	2,6		
	3		
	4		
168,3	2	286	143
	2,6		
	3		
	4		
219,1	3	356	178
	4		
	5		
273	3	432	216
	4		
	5		
	5		
323,9	3	508	254
	4		
	5		
355,6	3	558	279
	4		
	5		
406,4	3	610	305
	4		
	6		

TE REDUCTORA

REDUCER TEE

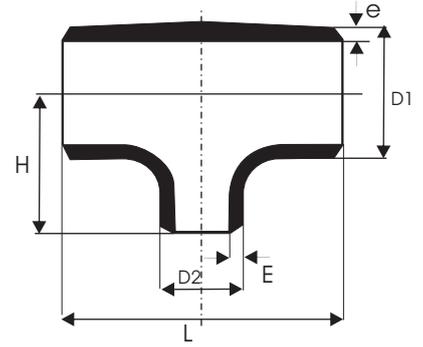


DIN 2615

D1 / D2 mm.	e mm.	L mm.	H mm.
21,3 / 17,2	1,6	-	-
	2		
	2,3		
26,9 / 17,2	1,6	58	29
	2		
	2,3		
33,7 / 21,3	1,6	76	38
	2		
	2,3		
42,4 / 26,9	2	96	48
	2,6		
	2,9/3,0		
48,3 / 21,3	2	114	57
	2,6		
	3		
	3,2		
60,3 / 26,9	2	128	64
	2,6		
	3		
	3,2		
76,1 / 33,7	2	152	76
	2,6		
	3		
	3,2		
88,9 / 42,4	2	172	86
	2,6		
	2,9/3,0		
	3,2		

D1 / D2 mm.	e mm.	L mm.	H mm.
114,3 / 48,3	2	210	105
	2,3		
	2,6		
	2,9/3,0		
139,7 / 76,1	2	248	124
	2,6		
	2,9/3,0		
168,3 / 76,1	2	286	143
	2,6		
	3		
	4		
219,1 / 76,1	2	356	178
	2,6		
	3		
	4		
	4,5		

REDUCCION CONCENTRICA
CONCENTRIC REDUCER
REDUCCION EXCENTRICA
ECCENTRIC REDUCER

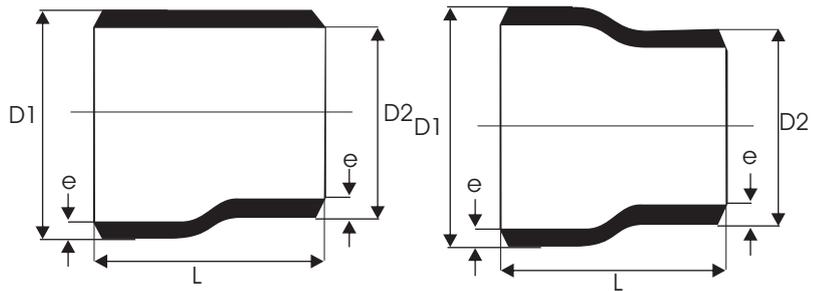

DIN 2616

D1 / D2 mm.	e mm.	L mm.	H mm.
21,3 / 17,2	1,6	—	—
	2		
	2,3		
26,9 / 17,2	1,6	58	29
	2		
	2,3		
33,7 / 17,2	1,6	76	38
	2		
	2,3		
42,4 / 21,3	2	96	48
	2,6		
	2,9/3,0		
48,3 / 21,3	2	114	57
	2,6		
	3		
	3,2		
60,3 / 26,9	2	128	64
	2,6		
	3		
	3,2		
76,1 / 33,7	2	152	76
	2,6		
	3		
	3,2		
88,9 / 42,4	2	172	86
	2,6		
	2,9/3,0		
	3,2		

D1 / D2 mm.	e mm.	L mm.	H mm.
114,3 / 48,3	2	210	105
	2,3		
	2,6		
	2,9/3,0		
139,7 / 76,1	2	248	124
	2,6		
	2,9/3,0		
168,3 / 76,1	2	286	143
	2,6		
	3		
	4		
219,1 / 76,1	2	356	178
	2,6		
	3		
	4		
	4,5		

